




Model

FS108D

8-Port 10/100 Mbps
Desktop Switch

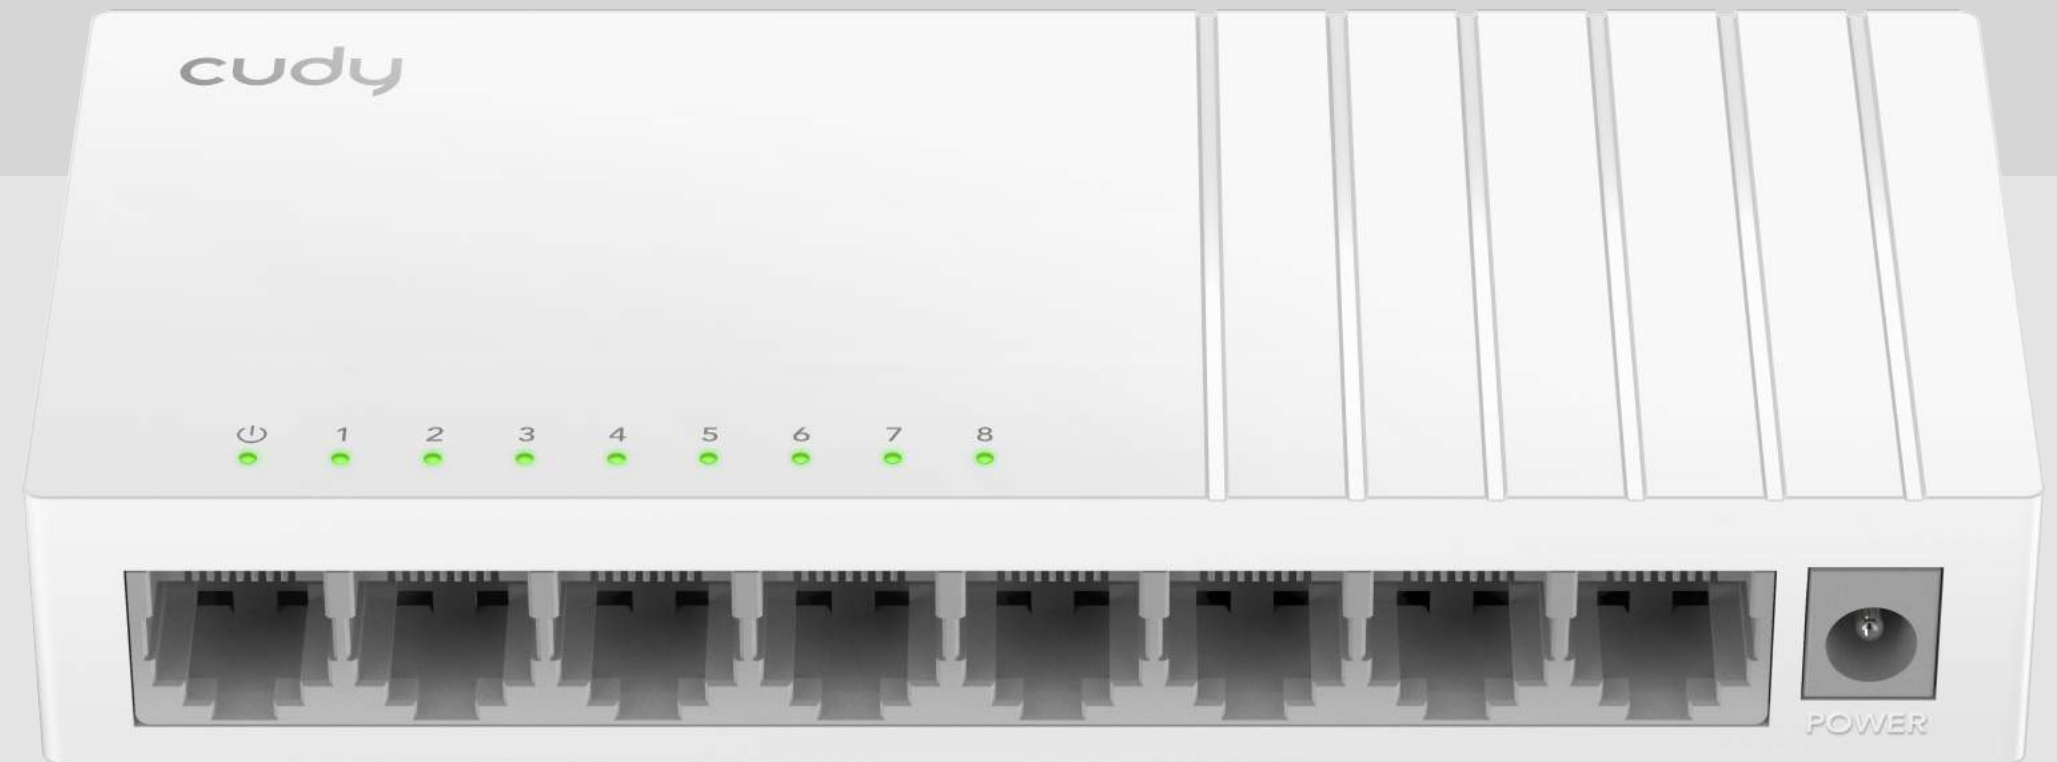

[Datasheet](#)

Features

- 8× 10/100 Mbps Ethernet Ports
- Reliable forwarding with 448 Kbit packet buffer
- Super power-efficient with max 1W / idle 0.25W rating
- Non-blocking switching architecture
- Desktop and wall-mounting

Specifications

| | |
|------------------------|---|
| Model | FS108D |
| Standards | IEEE 802.3i/u |
| Ethernet | 8× 10/100 Mbps Ports (Auto-Negotiation, Auto-MDI/MDIX) |
| Network Media | 10BASE-T: UTP Cat 3 or above cable (≤100 m) 100BASE-TX: UTP Cat 5 or above cable (≤100 m) |
| Transfer Method | Store-and-Forward |
| MAC Address Table | 512 |
| Switching Capacity | 1.6 Gbps |
| Packet Forwarding Rate | 1.1904 Mbps |
| Packet Buffer | 448 Kbit |
| Power Saving | Saves power consumption when ports are idle |
| Power Consumption | Max 1W, Idle 0.25W |
| Power | DC 5 V / 0.55 A |
| Dimensions (W×D×H) | 151×75×63 mm (5.94×2.95×2.48 inches) |
| Environment | Operating Temperature: 0°C~40°C Storage Temperature: -40°C~75°C Operating Humidity: 0%~100% non-condensing Storage humidity: 5%~95% non-condensing |
| Package Content | Switch, Power Adapter, Installation Guide |