

## DS-KH6320-WTE1 Network Indoor Station



The KH6 series IP indoor station, with 7-inch touch screen, brings you a fluent video and audio communication. By considering the difficulty of deployment of the traditional video intercom, the device has improved the design and can deploy the whole video intercom system by itself independently, without extra devices or configurations, which reduces the deployment time and cost. You can view, chat with, and send permission for the visitor via mobile phone in anywhere. The device can also link other control systems, such as CCTV system, elevator control system, etc.

- 7-inch TFT touch screen with 1024 × 600 resolution
- Convenient Hik-Connect APP Mobile Control
- Receive calls, open the door and live view remotely
- Easy to use without PC
- Easy wizard for quick set up
- Configure the whole system on one touch screen
- Live view of the door station and cameras in public areas
- Support voice messages when no response from the indoor station
- Receive alarms by linkage with a alarm system and notify the center to handle in time
- Elevator access control

## ▪ Specification


| System parameters                 |   |
|-----------------------------------|---|
| Operation system                  | Linux   |
| ROM                               | 32 MB   |
| RAM                               | 128 MB  |
| Processor                         | Embedded high performance processor   |
| Display parameters                |   |
| Screen size                       | 7-inch  |
| Operation method                  | Capacitive touch screen   |
| Type                              | Colorful TFT  |
| Resolution                        | 1024 × 600  |
| Video parameters                  |   |
| Lens                              | /   |
| Resolution                        | /   |
| FOV                               | /   |
| Wide dynamic range (WDR)          | /   |
| Video compression standard        | /   |
| Focal length                      | /   |
| Audio parameters                  |   |
| Audio input                       | 1 built-in omnidirectional microphone   |
| Audio compression standard        | G.711U/G.711A   |
| Audio output                      | 1 built-in loudspeaker  |
| Audio compression bitrate         | 64 Kbps   |
| Audio quality                     | Noise suppression and echo cancellation   |
| Volume adjustment                 | Adjustable  |
| Capacity                          |   |
| Message capacity                  | TF card inserted: 200 captured pictures, 200 alarm records<br>Without TF card: 2 MB RAM for picture storage; The storage number is decided by the picture size, 200 alarm records |
| Notice capacity                   | 200   |
| Linked indoor extensions capacity | 16  |
| Linked doorphone capacity         | 17  |
| Linked network camera capacity    | 16  |
| Network parameters                |   |
| Network protocol                  | TCP/IP, SIP, RTSP   |
| Wi-Fi                             | 2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n  |
| Bluetooth                         | /   |
| 3G/4G                             | /   |
| Zigbee                            | /   |
| Device interfaces                 |   |
| Alarm input                       | 8   |
| Network interface                 | 1 RJ-45 10/100 Mbps self-adaptive   |
| TAMPER                            | /   |

|                         |  |
|-------------------------|--|
| RS-485                  | 1 RS-485 (Half duplex)   |
| USB                     | /  |
| TF card                 | Support TF card, up to 128 G   |
| Alarm output            | 2  |
| Lock control            | 2 relays, Max. 30 VDC 0.3 A  |
| <b>General</b>          |  |
| Button                  | /  |
| Installation            | Surface mounting   |
| Indicator               | /  |
| Weight                  | Net weight: 355 g (0.8 lb)<br>Gross weight: 683 g (1.5 lb)   |
| Protective level        | /  |
| Working temperature     | -10 °C to 55 °C (14 °F to 131 °F)  |
| Working humidity        | 10% to 90% (no-condensing)   |
| Dimension (W × H × D)   | 200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")   |
| Battery                 | /  |
| Application environment | Indoor   |
| Power consumption       | ≤ 5 W  |
| Language                | English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese (Brazil), Spanish, Hebrew, Romanian, Turkish, Estonian, Danish, Swedish, Norwegian, Finnish, Vietnamese, Croatian, Slovenian, Serbian, Arabic, Portuguese (Portugal), Lithuanian, Uzbek, Kazakh, Mongolian, Ukrainian |

## ▪ Available Model

DS-KH6320-WTE1

## ▪ Dimension

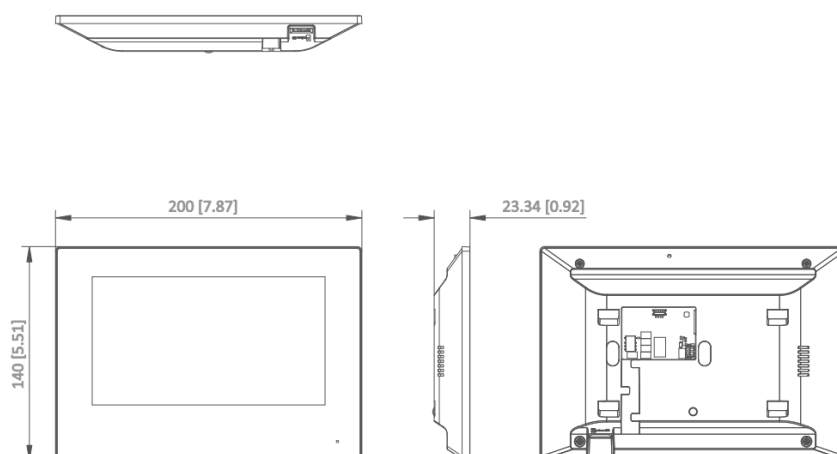

Unit:mm [inch]

SCALE 1:1

**▪ Accessory****▪ Optional**

| <b>DS-KAW50-1<br/>50W 12V Power<br/>Adapter</b>                                   | <b>DS-KABH6320-T<br/>Indoor Station<br/>Table Bracket</b>                         | <b>DS-KAW50-1N<br/>50W 12V Power<br/>Adapter</b>                                   |
|---|---|--|
|  |  |  |

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

